RAYNOR GARAGE DOORS

AR-C

Auto Reset - Conversion

The AR-C converts the FGH operator from a mechanically resetting system with fusible links to fully automatic that resets itself when power is restarted and the alarm is cleared.

AR-C elimates the need to physically reconnect the fusible link chain to the release device.

Features	Benefits
Failsafe time delayed release (app. 10 sec.)	Allows time for pedestrian traffic to move away
UL & CSFM (Calif. State Fire Marshal) listed	Compliance coverage
UL864 Compliant	Does not require uninterruptible power supply
For use on new or existing FGH operator, FHC Chain Hoist or FHK Crank	No more climbing ladders to attach chains
Activated by fire alarm control panel or local electors	Sacrifices very little space
Resets automatically after alarm is cleaned and power is restored	
Increases height of operator by only 3"	

Physical Attributes

- Mounts on top of operator when module for fusible link is removed.
- Can be installed with UL listed fusible links when required.
- NEMA1 enclosure for use indoors.
- **Dimensions**: 12"w x 5"h x 7"d

Electrical Attributes

- Powered by standard building current.
- **Input voltage**: 115V AC, 230V AC, 60Hz or 50Hz
- **Amperage**: 115V AC - 0.12, 230V AC - 0.06
- **Initiation signal**: FormC dry contact, 24V DC, 0.4 AC (max impedance 2.64 ohms)
- **Wiring**: 18 gauge (recommended)

ARC Works with:

FireHoist FGH

- ½ up to 3hp
- 30 cycles/hr
- On board cycle counter
- Optional timer to close

Crank FHK

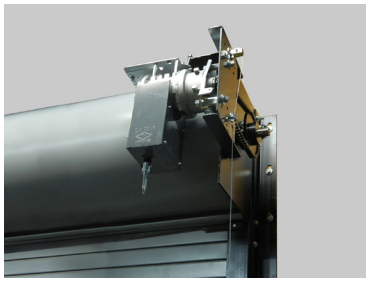

Also works with ChainHoist FHC

Available Exclusively from Raynor

FireCoil

Fire-Rated Rolling Door

Fire Curtain

Fire-Rated Rolling Counter Shutter

RAYNOR GARAGE DOORS

P.O. Box 448, 1101 East River Rd.
Dixon, IL 61021-0448
1-800-4-RAYNOR (472-9667)

Exclusively Distributed by:

©Raynor 2018 2908578 04/18