RAYNOR GARAGE DOORS

ONYX LIGHT (OLS)
LIGHT DUTY JACKSHAFT
For Commercial Sectional Doors

ONYX LIGHT (OLD)
LIGHT DUTY JACKSHAFT
For Commercial Dock Doors

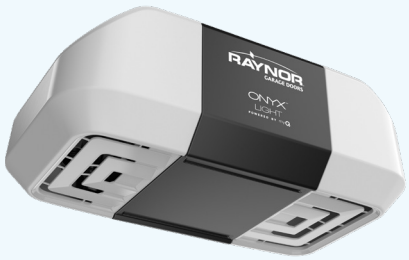

ONYX LIGHT (OLT)
LIGHT DUTY TROLLEY
For Commercial Sectional Doors

Light Duty Commercial Operators

ONYX™ LIGHT

POWERED BY myQ

Unlock the future of access control with Raynor's smart, quiet, and secure light-duty commercial door operators. Built for reliability and performance, these units provide enhanced security while ensuring smooth operation. Featuring simple controls and efficient functionality, ONYX LIGHT is a smarter, more reliable solution for managing entry points in low-traffic commercial applications.

ONYX™ LIGHT FEATURES & SPECIFICATIONS

SMART

CONNECTIVITY via built-in WiFi enables real-time firmware updates and provides free access to myQ Facility for remote monitoring and diagnostics, optimizing operations. (Available with OLS and OLD)

SOFT START/STOP on OLS and OLD, and motor vibration isolation system on OLT, provide smoother and quieter operation.

BATTERY BACKUP keeps operations running even in a power outage. (Optional with OLS and OLD)

SAFE

SECURITY+ 2.0 technology sends a new, unique code with every remote click, ensuring secure communication and protection against code hacking.

THE PROTECTOR SYSTEM automatically reverses the door if an obstruction is detected, protecting against potential harm or damage.

RELIABLE

INDUSTRY-LEADING SUPPORT from Raynor's customer service and dedicated technical support team ensures seamless installation, reliable operation, and easy maintenance, providing expert assistance at every stage.

ACCESSORIES

INCLUDED

- Push Button Wall Control • 6081147 *(OLT)*
- 3-Button Wall Control Station • 22150 *(OLD)*
- 1-Button Wall Control Station • 6081144 *(OLS)*
- Safety Reversing Sensors • 6081172 *(OLT)*
- Safety Reversing Sensors • 6081107 *(OLD & OLS)*
- Cable Tension Monitor *(OLD & OLS)*

OPTIONAL

- Security+ 2.0 Remotes
- Backup Battery • 6080759 *(OLD & OLS)*
- Automatic Door Lock • 6081095 *(OLD & OLS)*
- myQ Remote LED Light • 6081097
- LMi5 - Dock Door Sensor Interface Box *(OLD)*

SPECIFICATIONS

ONYX LIGHT LIGHT DUTY JACKSHAFT SECTIONAL DOORS	ONYX LIGHT LIGHT DUTY JACKSHAFT DOCK DOORS	ONYX LIGHT LIGHT DUTY TROLLEY SECTIONAL DOORS
MODEL NUMBER		
2125051 OLS	2125050 OLD	2125049 OLT
POWER		
120VAC 1PH	120VAC 1PH	120VAC 1PH
MAXIMUM DOOR SIZES		
14 ft height	14 ft height	14 ft height
18 ft width	18 ft width	16 ft width
650 lbs balanced doors	300 lbs balanced doors	650 lbs balanced doors
DUTY CYCLE		
Maximum 10 cycles per hour	Maximum 10 cycles per hour	Maximum 8 cycles per hour
Up to 25 cycles per day	Up to 25 cycles per day	Up to 25 cycles per day
MOTOR		
12VDC	12VDC	120VAC
DOOR SPEED		
Up to 6-8" per sec	Up to 12" per sec	Up to 6-8" per sec
UL® LISTED		
ONYX LIGHT commercial door operators are listed to ANSI/CAN/UL325 standards for USA/Canada.		
WARRANTY **(See Warranty for Terms & Conditions)**		
2 Year Limited Warranty	2 Year Limited Warranty	1 Year Limited Warranty

©2025 Raynor
2910218 05/25